


P.ELGAARD EFTF APS

MADS CLAUSENSVEJ 24, DK-9800 HJØRRING.TEL:+45 98909061

Mounting of fitting no. 18-06 or 08m mini XS

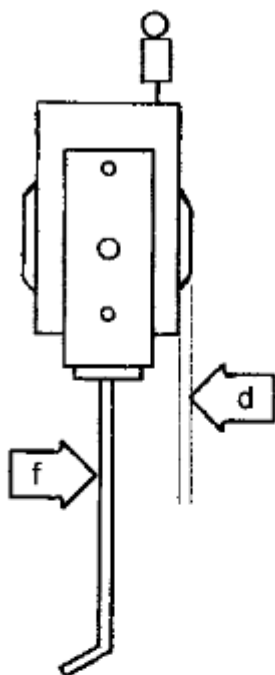

**Mounting set: one fitting – one cover plate –
Two screws – one handle – one UP/DOWN –
One hexagon socket screw key.**

Internal tape is about 5,5 or 7,2 meter long. Fitting must be mounted 1 meter from bottom of flagpole (a).

Drill 3 holes in longitudinal direction of flagpole – distance between centers 30mm – outer holes minimum 6mm, center hole minimum 12mm (b). Cover plate (c) can be used.

Place Up/Down sticker (e) around 12mm center hole.

To insert fitting in a base pipe, the reel must be placed parallel to the cassette (d). If not, rotate into position with handle.

Fitting can now be pushed into flagpole by using a steel rod with 8mm thread (f) which is screwed into bottom of fitting.

Cover plate (c) is placed over the holes and the 2 5 mm screws are put in by using included hexagon socket screw key.

